

LEL RACER



Tested in accordance with
PPE Regulation (EU) 2016/425


25 dB
SNR

Sound attenuation

SNR value (dB)	H value (dB)	M value (dB)	L value (dB)
25	28	22	20

Attenuation curves

Average value of sound attenuation (dB)

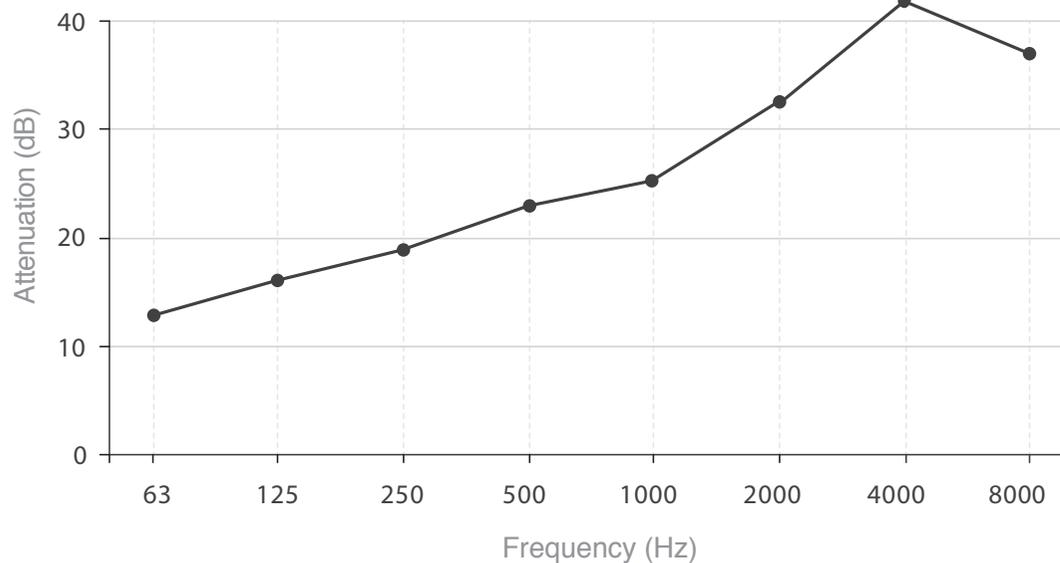

Technical Data

Frequency (Hz)	Average value* (dB)	Standard deviation (dB)	Protection** (dB)
63	13.9	4.0	7.9
125	16.1	4.8	11.9
250	19.0	5.5	14.5
500	22.7	4.5	18.2
1000	25.0	3.4	21.6
2000	32.2	5.0	27.2
4000	41.1	4.8	36.3
8000	36.9	5.0	31.9

*of sound attenuation II **APV (assumed)

Further details can be requested from the manufacturer.