

# LEL SOLIDZ



Certified and controlled in accordance with PPE Regulation (EU) 2016/425


22 dB  
SNR

## Sound attenuation

SNR value (dB)	H value (dB)	M value (dB)	L value (dB)
22	25	18	15

## Attenuation curve

Average value of sound attenuation (dB)

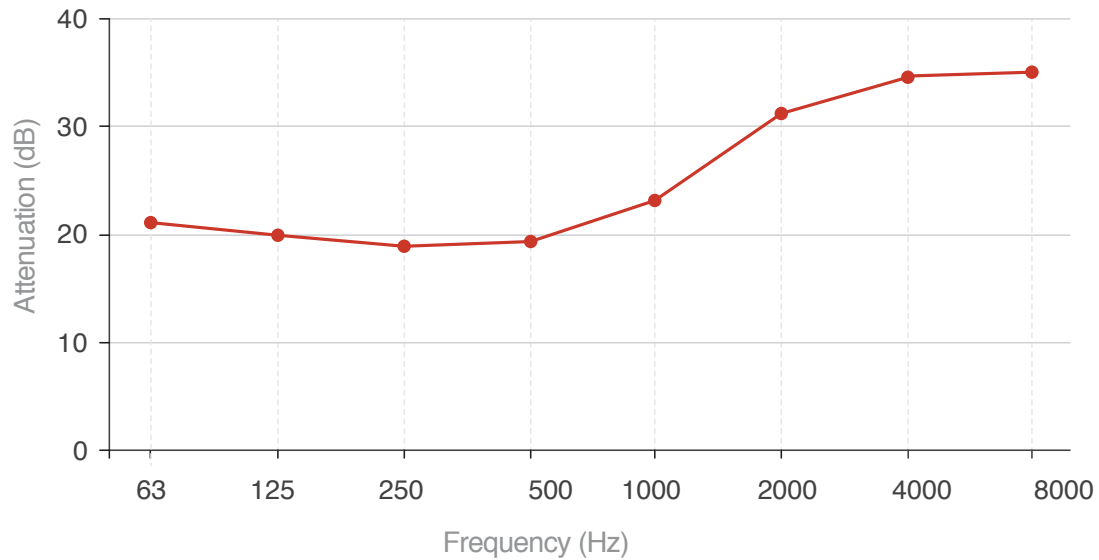

## Technical Data

Frequency (Hz)	Average value* (dB)	Standard deviation (dB)	Protection** (dB)
63	21,0	8,0	13,3
125	20,0	5,7	14,3
250	19,0	5,7	13,3
500	19,8	5,4	14,4
1000	22,8	4,6	18,2
2000	31,0	4,3	26,7
4000	34,4	4,4	30,0
8000	34,9	5,6	29,3

\*of sound attenuation II \*\*APV (assumed)

Further details can be requested from the manufacturer.